

ANTI-SLIP TO STICK

TBSAFE 65


ANTI-SLIP TO STICK OR ADHESIVE

TBSAFE 21
TBSAFE 20S
RAMPE AMOVIBLE

ANTI-SLIP ADHESIVE

SPEED GRIP
TBSAFE 21 AE1
TBSAFE 19
TBSAFE 16
TBSAFE 11R
TBSAFE 10

ANTI-SLIP

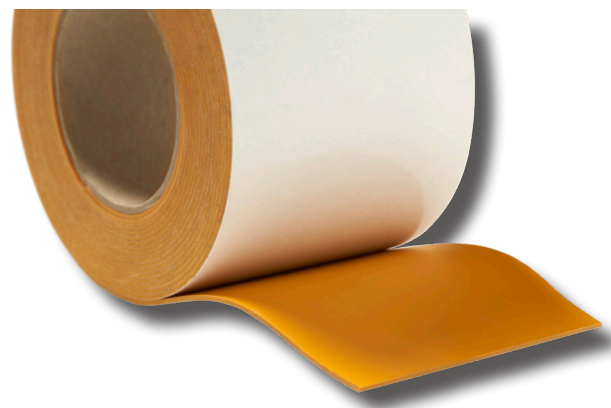

Colours not contractual



SLATE



YELLOW




TARPAULIN GREY

PERFORMANCE TESTING*



Slip resistance

SRT test according to EN 13036-4:
93 on dry ground, 33 on wet ground.



Other resistances

To deformation: 40% elongation before breaking.
To UV, natural chemical agents, oils, greases, hydrocarbons, salt water, abrasion and shocks.



Aquascope ecotoxicity test

Measures environmental toxicity in No toxicity aqueous media.

Tests performed by the following national laboratories: **GINGER CEBTP**, **CEREMA**, **LNE**

TBSAFE 19

Smooth and flexible anti-slip for heavy indoor traffic;

COMPOSITION: Flexible polyurethane elastomer complex on a non-woven rot-proof polyester support.

THICKNESS: 1.9 mm.

SURFACE: smooth.

WEIGHT: 1.8 kg/m².

TEMPERATURE HOLDING: -30°C to + 80°C.

LAYING: with AT7 adhesive

MAINTENANCE: wash with water and conventional detergents on a regular basis.

regularly. In factory and workshop, it is recommended to use industrial detergents with PH 9 and biodegradable.

STORAGE : in the original packaging, away from humidity. Handle at a temperature between +5°C and +30°C.

APPLICATIONS :

- . Stair risers
- . Courtesy strips
- . Post protection
- . Floor warning strips
- . Machine periphery
- . Impact noise: machine, workstation, building, boat, vehicle etc.

FORMATS

- Roll or Shape
- Self-adhesive or glue-on
- On request