

ANTI-SLIP TACTILE SURFACE

PAD

RESIN PAD
POLYMER PAD
MINERAL PAD

STUD

ANTIQUE STEEL STUD STAINLESS STEEL STUD STAINLESS STEEL DOME

ANTI-SLIP STAIR NOSING

ANTI-SLIP SURFACE ALUMINIUM PROFILE

FLAT PROFILE WITH INSERT SQUARE PROFILE WITH INSERT INSERT PROFILE WITH INSERT COMBO PROFILE WITH INSERT TILING PROFILE WITH INSERT

RISER

ADHESIVE SURFACE
ALUMINIUM PROFILE

PAINTED FLAT PROFILE


Polymer inserted flat profil

ANTI-SLIP GUIDING LINE

PAD

RESIN PAD POLYMER PAD MINERAL PAD

POLYMER INSERTED

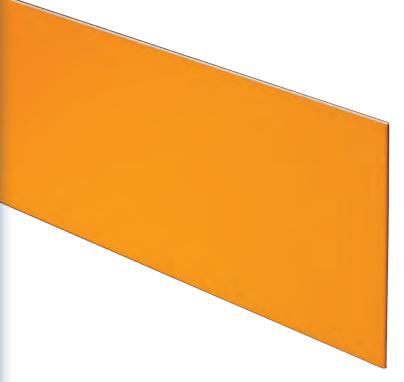

PERFORMANCE TESTING*



Resistance to fire and smoke

Fire - Smoke test: Bfl-s1

Tests carried out by the following French laboratories:

MATERIAL COMPLIANT

CLASSIFIED NON-FLAMMABLE

GINGER CEBTP

CEREMA LNE

PAINTED ALUMINIUM RISER C10AE

PRODUCT BENEFITS

The PROOPLE painted aluminium riser is UV and weather resistant, waterproof and easily cleaned. Its rigidity allows for it to be installed on all risers in stairwells with open stairs, both indoor and outdoor.

08/12/2014 REGULATION ALUMINIUM UV RESISTANT REACH COMPLIANT 10 CM WIDE INDOOR / OUTDOOR
RAPID SURFACE AVAILABILITY
FOR TRAFFIC

PROOPLE RECOMMENDATION

When installed on a large stairwell with open stairs, we recommend adding reinforcement to increase shock resistance.

MODE DE POSE

Installed using screws

- All risers
- Immediately available for traffic

Please refer to our installation instructions.

*REGULATIONS | Decrees of 8 December 2014.



ANTI-SLIP TACTILE SURFACE

PAD

RESIN PAD POLYMER PAD MINERAL PAD ALUMINIUM PAD

STUE

ANTIQUE STEEL STUD STAINLESS STEEL STUD STAINLESS STEEL DOME

ANTI-SLIP STAIR NOSING

ANTI-SLIP SURFACE ALUMINIUM PROFILE

FLAT PROFILE WITH INSERT SQUARE PROFILE WITH INSERT INSERT PROFILE WITH INSERT COMBO PROFILE WITH INSERT TILING PROFILE WITH INSERT

RISER

ADHESIVE SURFACE
ALUMINIUM PROFILE

PAINTED FLAT PROFILE

POLYMER INSERTED FLAT PROFILE

ANTI-SLIP GUIDING LINE

PAD

RESIN PAD POLYMER PAD MINERAL PAD

POLYMER INSERTED

DIMENSIONS

C10AE:

- 1150 x 100 mm
- 1500 x 100 mm

COLOURS

MELON YELLOW	
GREY TINT	
WHITE	
BLACK	

PACKAGING

Packaging < 15 Kg

NUMBER OF PRODUCTS	C10AE
	100
PACK	10
EACH	2

CONDITIONS FOR STORAGE AND USE

Store in original packaging, in a dry area. Install at between +5°C and +30°C.

MAINTENANCE

Clean with water and regular cleaning products with a soft brush.



TECHNICAL DIAGRAM

100

