

ANTI-SLIP TACTILE SURFACE

PAD

- RESIN PAD
- POLYMER PAD
- MINERAL PAD
- ALUMINIUM PAD

STUD

- ANTIQUE STEEL STUD
- STAINLESS STEEL STUD
- STAINLESS STEEL DOME

ANTI-SLIP STAIR NOSING

ANTI-SLIP SURFACE
ALUMINIUM PROFILE

- FLAT PROFILE WITH INSERT
- SQUARE PROFILE WITH INSERT
- INSERT PROFILE WITH INSERT
- COMBO PROFILE WITH INSERT
- TILING PROFILE WITH INSERT

RISER

ADHESIVE SURFACE
ALUMINIUM PROFILE


- PAINTED FLAT PROFILE
- POLYMER INSERTED FLAT PROFILE**

ANTI-SLIP GUIDING LINE

PAD

- RESIN PAD
- POLYMER PAD
- MINERAL PAD

POLYMER INSERTED
ALUMINIUM PROFILE

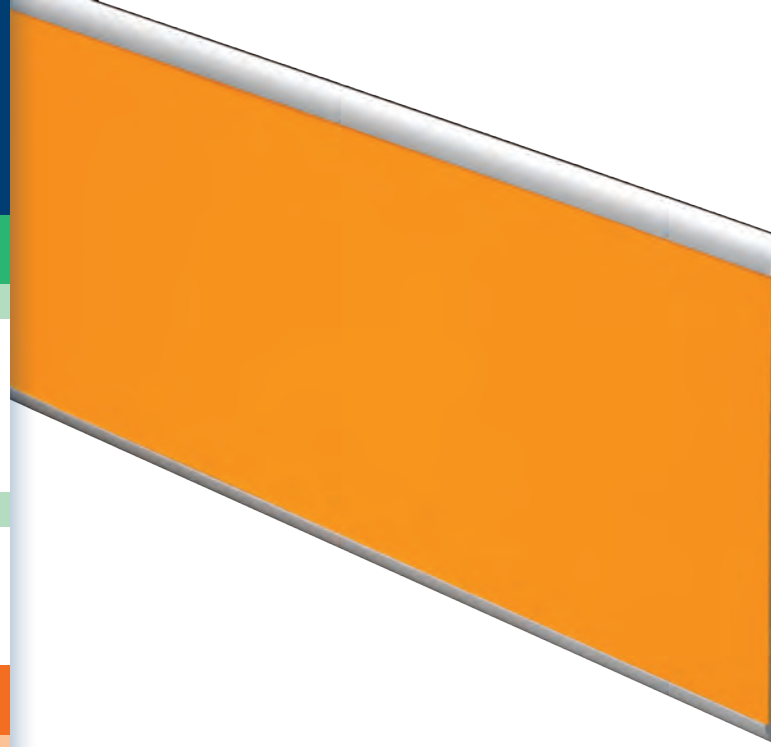

PERFORMANCE TESTING*



Resistance to fire and smoke

Fire - Smoke test: Bfl-s1

COMPLIANT

Tests carried out by the following French laboratories :

**GINGER CEBTP
CEREMA
LNE**

**ALUMINIUM POLYMER RISER
C10AP**

PRODUCT BENEFITS

The PROOPLE aluminium polymer riser is UV and weather resistant, waterproof and easily cleaned. It is very resistant to shocks and rubbing, and can be applied permanently on all risers in stairwells with open stairs, both inside and outside. It is recommended for establishments receiving the public (Category 1) and for roadways. The 100 mm contrasted surface hides the external screws.

08/12/2014 REGULATION
ALUMINIUM POLYMER
UV RESISTANT
REACH COMPLIANT
10 CM WIDE

INDOOR / OUTDOOR
RAPID SURFACE AVAILABILITY
FOR TRAFFIC

PROOPLE RECOMMENDATION

When installed on a large stairwell with open stairs, we recommend adding reinforcement to increase shock resistance.

MODE DE POSE

Installed using screws

- All risers
- Immediately available for traffic

Please refer to our installation instructions.

*REGULATIONS | Decrees of 8 December 2014.

ANTI-SLIP TACTILE SURFACE

PAD

RESIN PAD
POLYMER PAD
MINERAL PAD
ALUMINIUM PAD

STUD

ANTIQUÉ STEEL STUD
STAINLESS STEEL STUD
STAINLESS STEEL DOME

ANTI-SLIP STAIR NOSING

ANTI-SLIP SURFACE ALUMINIUM PROFILE

FLAT PROFILE WITH INSERT
SQUARE PROFILE WITH INSERT
INSERT PROFILE WITH INSERT
COMBO PROFILE WITH INSERT
TILING PROFILE WITH INSERT

RISER

ADHESIVE SURFACE ALUMINIUM PROFILE

PAINTED FLAT PROFILE
POLYMER INSERTED FLAT PROFILE

ANTI-SLIP GUIDING LINE

PAD

RESIN PAD
POLYMER PAD
MINERAL PAD

POLYMER INSERTED ALUMINIUM PROFILE

DIMENSIONS

C10AP:

- 1150 x 100 mm
- 1500 x 100 mm
- 2300 x 100 mm

COLOURS

MELON YELLOW

GREY TINT

WHITE

BLACK

PACKAGING

Packaging < 15 Kg

NUMBER OF PRODUCTS	C10AP
	100
PACK	10
EACH	2

CONDITIONS FOR STORAGE AND USE

Store in original packaging, in a dry area.
Install at between +5°C and +30°C.

MAINTENANCE

Clean with water and regular cleaning products with a soft brush.

TECHNICAL DIAGRAM

