

PROOPLE

Anti-slip and ground Safety Solutions

ANTI-SLIP TO STICK

TBSAFE 65


ANTI-SLIP TO STICK OR ADHESIVE

TBSAFE 21
TBSAFE 20S
RAMPE AMOVIBLE

ANTI-SLIP ADHESIVE

SPEED GRIP
TBSAFE 21 AE1
TBSAFE 19
TBSAFE 16
TBSAFE 11R
TBSAFE 10

ANTI-SLIP

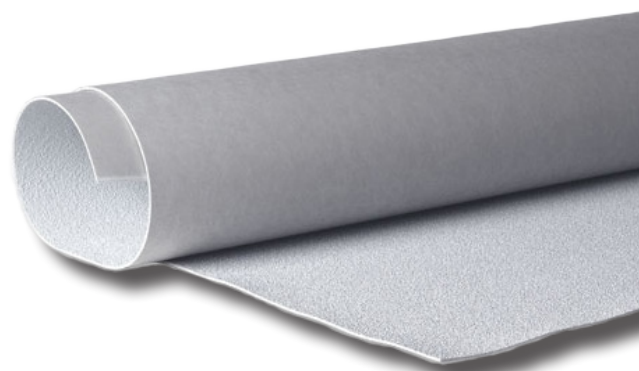

Colours not contractual.



TARPAULIN
GREY



YELLOW



BLACK

PERFORMANCE TESTING*




Slip resistance

SRT test according to EN 13036-4:
1.12 on dry ground, 0.67 on wet ground.



Fire and smoke resistance

Classification according to NF EN 13501-1: Cfl-s1.



Other resistances

To deformation: 40% elongation before breaking.
To UV, natural chemical agents, oils, greases,
hydrocarbons, salt water, abrasion and to shocks.



Aquascope ecotoxicity test

Measures environmental toxicity in No toxicity
aqueous media.

Tests performed by the following national laboratories:
GINGER CEBTP
CEREMA
LNE

TBSAFE 21 thick adhesive AE1

Anti-slip interior / exterior SPECIAL DEGRADED FLOORS

COMPOSITION: medium grain polyurethane elastomer complex with very high anti-skid performance, on a non-woven woven polyester support.

THICKNESS: 2.1 mm.

SURFACE: 800 micron non-abrasive flexible powder.

WEIGHT: 2.5 kg/m².

TEMPERATURE HOLDING: -30°C to + 80°C.

LAYING : by AE1 adhesive on degraded floor

MAINTENANCE : Washing with water and conventional detergents on a regular basis.

regularly. In interior (factory, workshop...), recommended use of industrial detergents with a pH 9 and biodegradable.

STORAGE : in the original packaging, away from humidity. Handle at a temperature between +5°C and +30°C.

ADHESIVE : Highly resistant to temperature (-40°C / +120° C), chemicals, humidity and chemical products, humidity and UV.

APPLICATIONS :

- . Stair nosing
- . Distancing strips
- . Any strip on coated ground, smooth concrete...
- . Tower of machines
- . Traffic zones

FORMATS

ROLLER self-adhesive
50 mm x 10 m
100 mm x 10 m

CONDITIONS OF USE :

- . Pedestrian use in extreme conditions. Resistant to sea air.
- . Installation on degraded ground (asphalt...)

1 rue du Coteau Moreau, 49290 Chalonnes-sur-Loire, FRANCE - Tél. +33 (0)2 44 10 85 29 - contact@proople.eu - www.proople.eu