

ANTI-SLIP TACTILE SURFACE

PAD

- RESIN PAD
- POLYMER PAD
- MINERAL PAD
- ALUMINIUM PAD

STUD

- ANTIQUE STEEL STUD
- STAINLESS STEEL STUD
- STAINLESS STEEL DOME

ANTI-SLIP STAIR NOSING

**ANTI-SLIP SURFACE
ALUMINIUM PROFILE**

- FLAT PROFILE WITH INSERT**
- SQUARE PROFILE WITH INSERT
- INSERT PROFILE WITH INSERT
- COMBO PROFILE WITH INSERT
- TILING PROFILE WITH INSERT

RISER


- ADHESIVE SURFACE
- ALUMINIUM PROFILE
- PAINTED FLAT PROFILE
- POLYMER INSERTED FLAT PROFILE

ANTI-SLIP GUIDING LINE

PAD

- RESIN PAD
- POLYMER PAD
- MINERAL PAD

**POLYMER INSERTED
ALUMINIUM PROFILE**

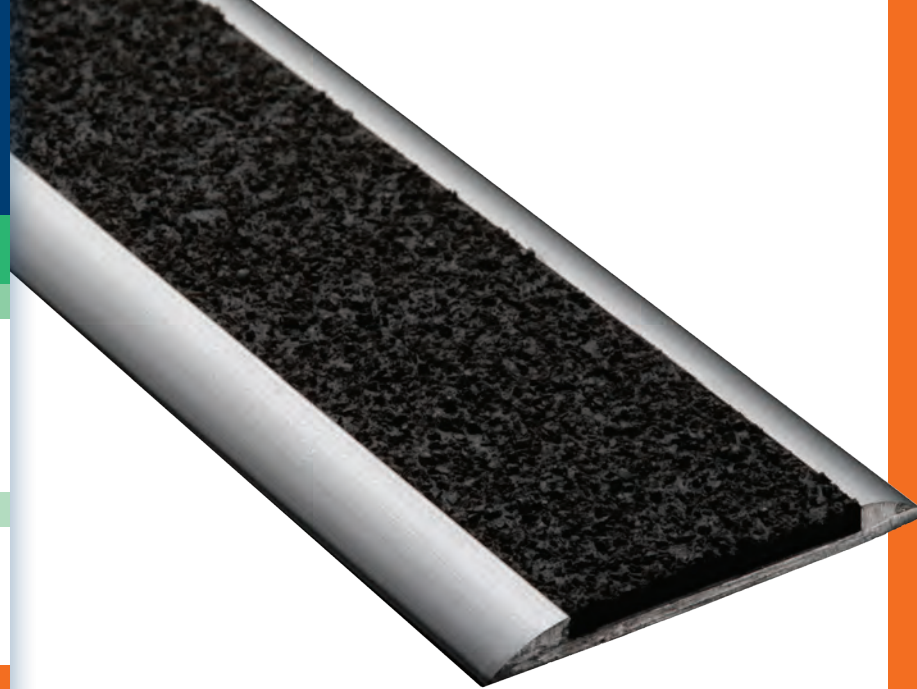

**ALUMINIUM POLYMER FLAT PROFILE
WITH INSERT NP3AP / NP5AP**

PRODUCT BENEFITS

The PROOPLE flat profile aluminium and polymer stair nosing is UV and weather resistant. It is very resistant to high traffic and slipping on wet surfaces, and is recommended for all types of stairs. The attack angle of the profile is optimized (< 30°) in order to avoid causing accidents. The contrasted anti-slip surface in widths of either 3 cm or 5 cm hides the screws when installed.

08/12/2014 REGULATION
ALUMINIUM POLYMER
UV RESISTANT
REACH COMPLIANT
3 CM OR 5 CM WIDTHS

INDOOR / OUTDOOR
HIGH TRAFFIC
HIGH RESISTANCE TO SLIPPING
RAPID SURFACE AVAILABILITY
FOR TRAFFIC

PROOPLE RECOMMENDATION

The anti-slip polymer band comes from PROOPLE's nautical experience, and is non-abrasive, for barefoot traffic. It is easily and economically replaced. We recommend it for humid environments.

METHODS OF INSTALLATION

Installed using screws

- All stairway materials
- Immediately available for traffic

Please refer to our installation instructions.

PERFORMANCE TESTING*



Resistance to slipping

Tread SRT test > 0.40
AFPV test of dome > 0.45



Resistance to fire and smoke

Fire - Smoke test: Bfl-s1

COMPLIANT

Tests carried out by the following French laboratories :

**GINGER CEBTP
CEREMA
LNE**

*REGULATION | Decrees of 8 December 2014 and 15 January 2007.

ANTI-SLIP TACTILE SURFACE

PAD

- RESIN PAD
- POLYMER PAD
- MINERAL PAD
- ALUMINIUM PAD

STUD

- ANTIQUÉ STEEL STUD
- STAINLESS STEEL STUD
- STAINLESS STEEL DOME

ANTI-SLIP STAIR NOSING

ANTI-SLIP SURFACE ALUMINIUM PROFILE

FLAT PROFILE WITH INSERT

- SQUARE PROFILE WITH INSERT
- INSERT PROFILE WITH INSERT
- COMBO PROFILE WITH INSERT
- TILING PROFILE WITH INSERT

RISER

ADHESIVE SURFACE ALUMINIUM PROFILE

- PAINTED FLAT PROFILE
- POLYMER INSERTED FLAT PROFILE

ANTI-SLIP GUIDING LINE

PAD

- RESIN PAD
- POLYMER PAD
- MINERAL PAD

POLYMER INSERTED ALUMINIUM PROFILE

DIMENSIONS

NP3AP:

- 1150 x 30 mm
- 1500 x 30 mm
- 2300 x 30 mm

NP5AP:

- 1150 x 50 mm
- 1500 x 50 mm
- 2300 x 50 mm

COLOURS

IVORY	AGATE GREY
MELON YELLOW	GREY TINT
CARMINE RED	PALE BROWN
OXYDE RED*	WHITE
TRAFFIC BLUE	BLACK
SIGNAL GREEN	

* COLOURS AVAILABLE IN SEPTEMBER 2017

PACKAGING

Packaging < 15 Kg

NUMBER OF PRODUCTS	NP3AP	NP5AP
	30	50
PACK	10	10
EACH	2	2

CONDITIONS FOR STORAGE AND USE

Store in original packaging, in a dry area.
Install at between +5°C and +30°C.

MAINTENANCE

Clean with water and regular cleaning products with a soft brush.

TECHNICAL DIAGRAM

